


WAVEGRIP mounting structure detail

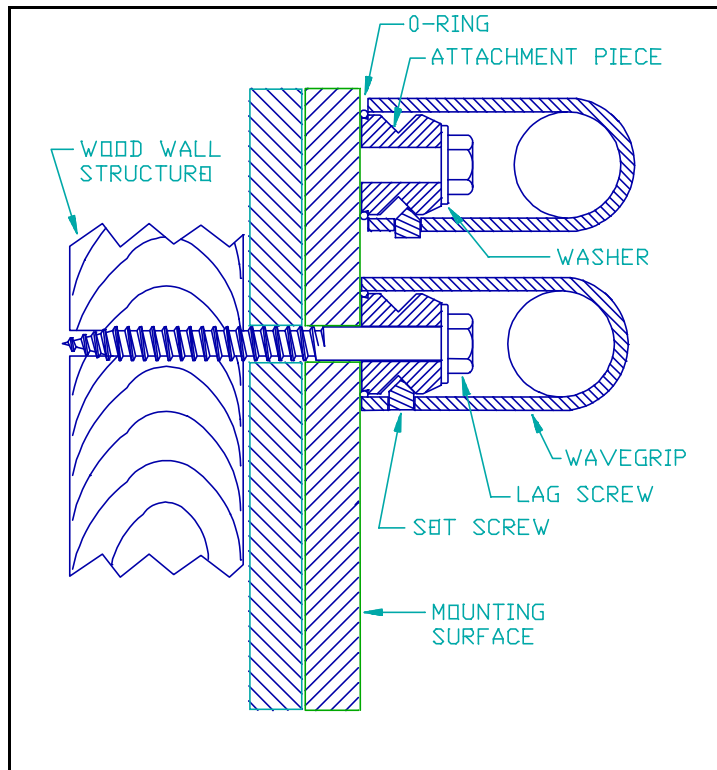


Locate the position of the WAVEGRIP grab rail and mark holes.

After the proper size holes are drilled, install the attachment piece, O-ring, washer & lag screw (& support ring in needed). It is not necessary to over-tighten the lag screw.

Place the WAVEGRIP tube end over the attachment piece and tighten the stainless set screw onto the bevel of the attachment piece. As the set screw is tightened, the tube is forced toward the mounting surface - compressing the O-ring and sealing the tube.

NOTE: gently rock the grab rail when tightening the set screw to evenly compress the O-ring.

MADE IN THE USA BY  16141 Runnymede Street
Van Nuys, CA 91406-2913
TEL:(818) 782-6793 FAX:(818) 782-6485
Info@wavegrip.com